

DATSUN 1600

The extra-special sporty family sedan.





Now, with more comfort, more performance!

Here's the DATSUN that has been winning worldwide acclaim among sports and family drivers. But now, with a few small but significant changes for even safer and more



luxurious motoring. You still get the dynamic

DATSUN shift choice: fully automatic transmission, sporty 4-on-the-floor or 3-speed column shift. Top performance whichever you choose.

The eye-catching grille and long, low, lively styling is still with us, but we've complemented the new DATSUN 1600 by adding lots more touches of care.

Engine Power Aplenty!

Here's the power pack that has put DATSUN cars first over the finishing line in rallies around the world. A 1600cc OHC engine that generates 96 HP to fly you along at 100 mph!


Five main bearings! The ultimate in smooth action. Quiet and vibration-free even at top revs. Plus a sporty two-barrel venturi carburetor.

Extra Braking Power, Too!



Disc brakes up front can be ordered with the DATSUN 1600. Tandem master cylinder to control front and back brake systems independently is standard on the Deluxe models, optional on the Standard.

All-Road Suspension

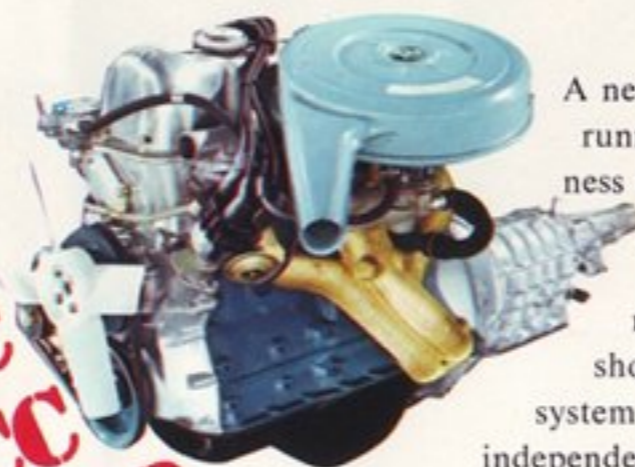

**OHC
1600 CC
96HP**

A new level of running smoothness on any road from a special rear mounted nitrogen/oil shock absorbing system. And fully independent four

wheel suspension! **And What Else?**

Inside, all the luxury you could want. Fully reclining seats (optional), bucket or bench. Round cockpit style instruments with glare-free glass. Spacious curved windows. Rally proven tachometer (optional). Cool and fresh adjustable flow-through ventilation system.



Specifications

Models: DATSUN 1600 Deluxe, 1600 Standard

Engine: 4-cylinder, in-line, water-cooled, 4-cycle. OHC. Bore x Stroke 83.0 x 73.7 mm (3.27 x 2.90 in.). Displacement 1,595 cc (97.3 cu. in.). Max. BHP 96 at 5,600 rpm (SAE). Max. torque 13.8 m·kg (99.8 ft.-lbs.) at 3,600 rpm (SAE). Compression ratio 8.5:1.

Transmission: Manual: All-Synchromeshed. 4-speed with floor gearshift or 3-speed with steering column gearshift. Gear ratio: 4-speed; 1st 3.38, 2nd 2.01, 3rd 1.31, Top 1.00, Rev. 3.36. 3-speed; 1st 3.26, 2nd 1.64, Top 1.00, Rev. 3.35. Dry single disc clutch with diaphragm spring. Automatic: 3-speed with steering column gearshift. Gear ratio: 1st 2.39, 2nd 1.45, Top 1.00, Rev. 2.09.

Front Suspensions: Independent strut type with tension rod and stabilizer.

Rear Suspensions & Axles: Independent, semi-trailing arm with coil springs and double-acting telescopic shock absorbers. Semi-floating rear axle. Hypoid final gear. Gear ratio: 4-speed; 3.70 to 1. 3-speed; 3.90 to 1.

Steering: Recirculating ball gear. Gear ratio: 15.0:1.

Wheels & Tires: Steel disc wheels. 5.60-13-4PR tires.

Brakes: Hydraulic service brakes. Front: two leading shoes. Rear: Leading and trailing shoes. Parking brake mechanically operated on rear wheels.

Body Works: 4-door Sedan. All steel unitary body construction. Fully upholstered with vinyl leather. Safety glass on all windows and doors. Adjustable bucket or bench front seats. Vinyl floor mat. Safety belt anchorages for front and rear seats. 2-speed wipers. Ash trays for front and rear. Glove compartment. Two sun visors. Self-canceling directional lever. Light selector lever. Backup lamps. Side flasher lamps. Oil pressure warning light. Fuel tank lock. Parcel tray. Trunk floor mat. Full-flow ventilator. Windshield washer. Cigarette lighter? Armrest** Tandem master cylinder? Package tray** Trip meter**.

*Optional for Standard. **Not available for Standard.

Dimensions, Weight & Performance: Overall Length 4,120 mm (162.2 in.) [4,070 mm (160.2 in.)]. Overall Width 1,560 mm (61.4 in.). Overall Height 1,410 mm (55.5 in.). Wheelbase 2,420 mm (95.3 in.). Tread: Front; 1,270 mm (50.0 in.). Rear; 1,270 mm (50.0 in.) Vehicle Weight: Manual; 4-speed 930 kg (2,050 lbs.) [905 kg (1,995 lbs.)]. 3-speed 925 kg (2,039 lbs.) [900 kg (1,984 lbs.)]. Automatic; 950 kg (2,094 lbs.) [925 kg (2,039 lbs.)].


Seating Capacity: 5 persons.

Max. Speed: Manual; 160 km/h (100 mph). Automatic; 155 km/h (96 mph). Min. Ground Clearance 210 mm (8.3 in.). Max. Grade Ability (sin θ): Manual; 4-speed 0.382 [0.409]. 3-speed 0.389 [0.418]. Automatic; 0.455.

[] Standard only.

Optional Equipment: Disc brakes up front. Tinted glass. Carpet. Headrest. Outside side mirror. Heater. Radio. Master vac. Collapsible, thick padded steering wheel. Clock. Seat belts. Steering lock. Anti-wind lift type wiper blades. 50/60 AH battery. Four-way flasher. Tachometer. Radial tire (165SR-13-4PR). Front reclining seats (4-speed only) (Not available for Standard).

These specifications are subject to change without notice.

 NISSAN MOTOR CO., LTD.

BISHOPS GARAGES
BRIGHTON LTD.

HESTON HOUSE,
6-8 ROYAL GEORGE RD.